

INSTALLATION INSTRUCTION

Model: VT-80404
LINKABLE PRISMATIC FITTING





INTRODUCTION

Thank you for selecting and buying V-TAC LED Linkable prismatic fitting. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have \ any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.

TECHNICAL PARAMETERS

Performace parameter	Lamp	warm white	natural white	cool white
	Lumens (lm)	3000 lm	3100 lm	3200 lm
		3000K	4000K	6400K
	CRI	≥80		
	Type of LED	SMD 2835		
	Beam angle	110°		
	Decay rate (%)	less than 3% within 1000 working hours		
	Total power (W)	40W		
	Lifespan (Hrs)	≥30000Hrs		
	High voltage testing	1500Vac/1min		
LED parameter	Lighting efficiency	100LM/W		
	Chip quantity	240PCS		
	Series-parallel way	24C10B		
	Voltage	74 - 78V DC		
	Current	2 x 240mA		
Driver specification	Input parameter	110~240Vac, 50/60Hz		
	Power factor	0.9		
	Output parameter	30-80V DC, 2 x 240mA		
Structure parameter	Material	PC		
	Dimension	1200 x 75 x 26mm		
	Cut - out	/		
	Protection class	calss II		
	IP	IP20		
Environment parameter	Application	hotel, home-lighting, recreation place, supermarket office building		
	Operating temperature	-25°C ~ 50°C, 10% - 90% R.H.		
	Storage temperature	-30°C ~ 85°C, 0% - 95% R.H.		
Packing specification	Qty / Ctn	carton size	N.W	G.W

STRUCTURE & SIZE

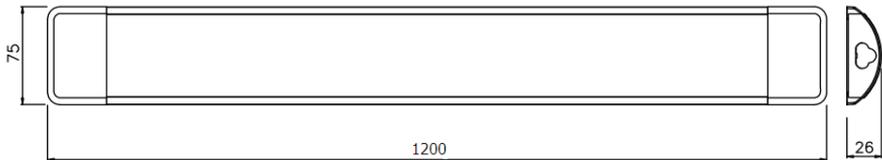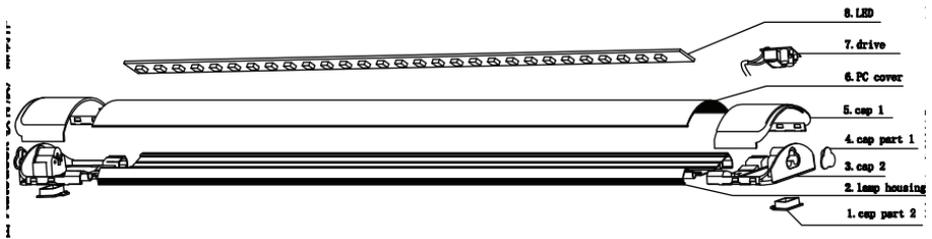

INSTALLATION INSTRUCTION

1. Switch off the power.
2. Ensure the ceiling has enough space to open a suitable hole. (picture 1)
3. Fix the bracket on the wall by screw and plastic wall plug (picture 2)
4. Connect the light into the mains (100-240V) in a correct way. (picture 3)
5. Fix the lamp on the bracket. (picture 4)
6. Switch on the power if above steps are done properly without any mistakes. .

