


INSTALLATION INSTRUCTION

LED LIGHT

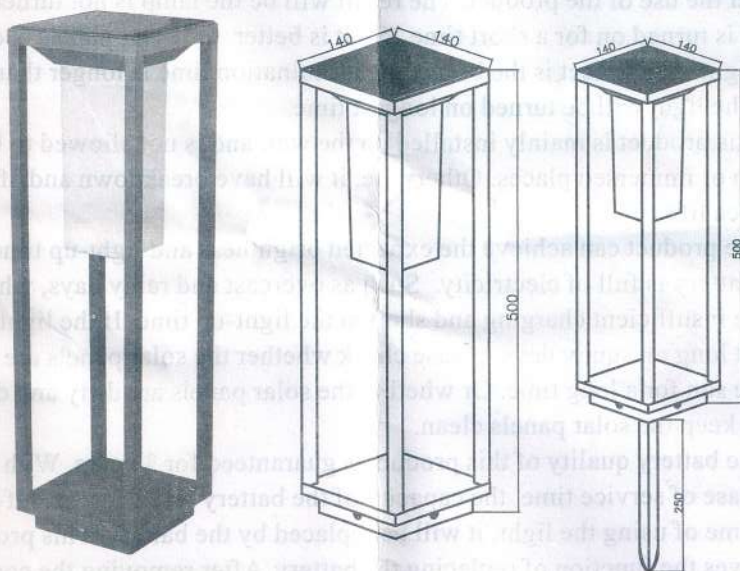


TECHNICAL DATA:


Model No.	VT-66
Power:	2W
Lumens:	280lm
Beam Angle:	120
CRI:	>80
Protection Rating:	IP65

**3 YEARS
WARRANTY**

STRUCTURE & SIZE

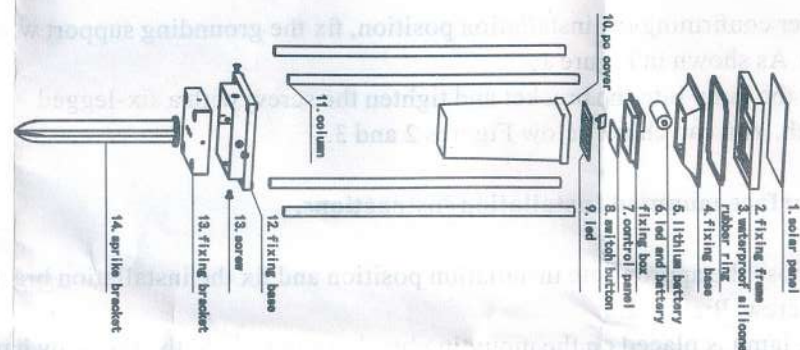

INSTALLATION DIAGRAM:

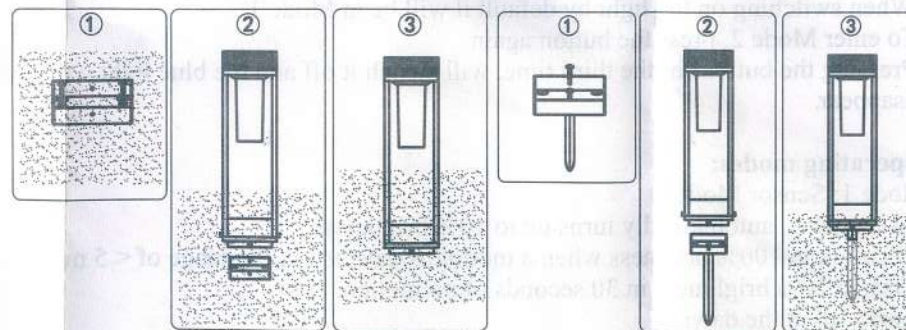

I. Ground insertion Installation instructions.

1. After confirming the installation position, fix the grounding support with screw. As shown in Figure 1.
2. Put the lamp into the bracket and tighten the screw with a six-legged wrench. You can check below Figures 2 and 3.

II. Surface mounted Installation instructions.

1. Choose the appropriate installation position and fix the installation bracket with screw. Picture 1.
2. The lamp is placed on the mounting bracket and tighten the screw by hand with a six-legged wrench.

Switch Function:

- Press and hold the button for 2-3 seconds to switch on and indicate a blue light.
- When switching on the light by default it will be in Mode 1.
- To enter Mode 2, press the button again.
- Pressing the button for the third time, will switch it off and the blue light will disappear.

Operating modes:

Mode 1: Sensor Mode.

- At the dusk, automatically turns on to 10% brightness.
- Turns on to 100% brightness when a motion is detected in the range of < 5 mtrs.
- Turn to 10% brightness in 30 seconds of no motion.
- Turns off at the dawn.

Mode 2: Constant Brightness Mode.

- The sensor will be disabled
- Automatically turn on at the dusk(100% brightness) and works constantly till the battery capacity reduces to Zero. (Upto 4 hours)

Notes

1. This product is a solar energy product. When installing, the solar panels of the product must be illuminated in the direction of the sun. Otherwise, it will affect the use of the product. The result will be the lamp is not turned on or the light is turned on for a short time. So it is better the solar panels is direct the sunlight. The effect is the best if the illumination time is longer than 6 hours and the light will be turned on longest time.
2. This product is mainly installed on the wall and is not allowed to be used in damp or immersed places. Otherwise, it will have breakdown and affects its service life.
3. The product can achieve the expected brightness and light-up time when the battery is full of electricity. Such as overcast and rainy days, which will cause insufficient charging and shorten the light-up time. If the lighting time is not long on sunny days, please check whether the solar panels are exposed to the sun for a long time. Or whether the solar panels are dirty and dusty, we must keep the solar panels clean.
4. The battery quality of this product is guaranteed for 3 years. With the increase of service time, the capacity of the battery will decrease. If it affects the time of using the light, it will be replaced by the battery. This product reserves the function of replacing the battery. After removing the connection wire of the original lithium battery, the battery will be removed and replaced with the new battery of the same specification.