

INSTALLATION INSTRUCTION

Model: VT-433 WHITE
LED LIGHT



INTRODUCTION AND WARRANTY

Thank you for selecting and buying V-TAC LED product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.


The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

INSTALLATION INSTRUCTION

Installation instructions:

1. Switch off the power.
2. Install track in the ceiling solidly. (see below pic.1)
3. Connect the track to mains(110V-220V) in a correct way. (see below pic.2)
4. Turn adaptor slide switch. (see below pic.3)
5. Fix the lamp into track(see below pic.4), lift up the lamp and turn adaptor slide switch. (see below pic.5)
6. Switch on the power if above steps done properly without any mistakes.


1




2




3



4




5



TECHNICAL PARAMETERS

performance parameter	lamp	warm white	natural white	cool white
	lumen (lm)	2700	2850	3000
	color temperature (K)	3000K	4000K	5000K
	CRI	≥ 90		
	type of LED	COB LED		
	beam angle	24°		
	decay rate (%)	less than 3% within 1000 working hours		
	total power (W)	31-35W		
	lifespan (Hrs)	≥ 30000 Hrs		
	high voltage testing	1750Vac/1min		
LED parameter	lighting efficiency	130LM/W		
	chip quantity	120PCS		
	series-parallel way	12C10B		
	voltage	31.8-37.5VDC		
	current	900mA		
driver parameter	input parameter	220~240VAC, 50/60Hz		
	power factor	>0.9		
	output parameter	900MA $\pm$ 5% 24-44VDC		
structure parameter	material	Aluminium		
	dimension	230*107*240mm		
	cut-out	/		
	protection class	class I		
	IP	IP20		
environment parameter	application	hotel, home-lighting, recreation place, supermarket, office building		
	operating temperature	-25℃ ~ 50℃, 10% ~ 90% R.H.		
	storage temperature	-30℃ ~ 85℃, 0% ~ 95% R.H.		
packing	Qty/Ctn	carton size	N.W	G.W
specification				

STRUCTURE & SIZE

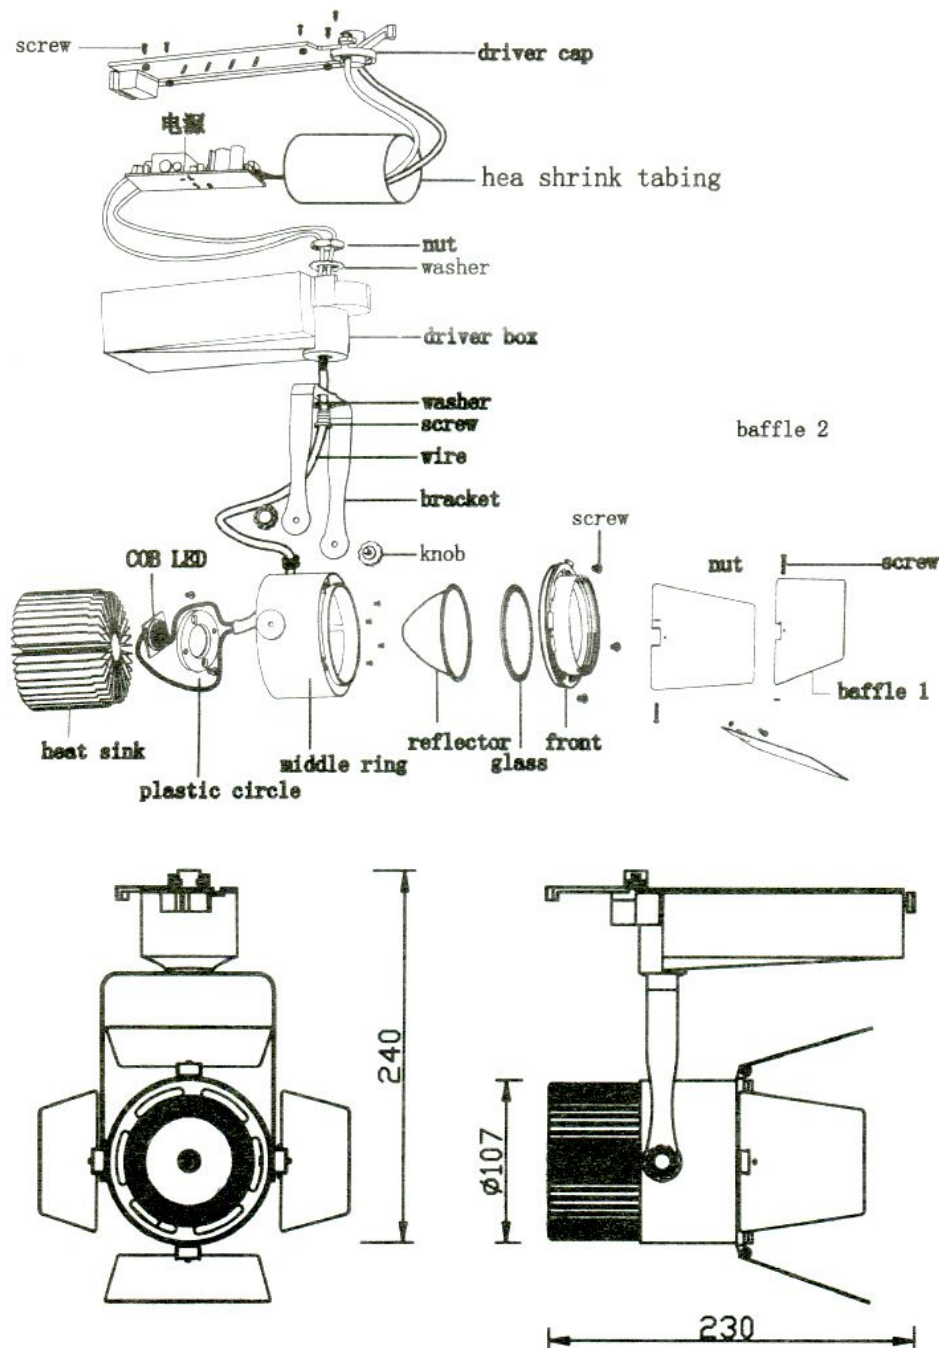

BEVEZETÉS&GARANCIA

Köszönjük, hogy választotta és megvette V-TAC LED. V-TAC a legjobbat ajánlja. Kérem figyelmesen elolvasni ezeket az utasításokat mielőtt elkezdi a telepítési folyamatot és óvja ezt a kézikönyvet későbbi használatra.

A garancia a vásárlás napjától számított 5 évig érvényes. A garancia nem vonatkozik a helytelen telepítés vagy az abnormális kopás okozta károkra. A cég nem vállal semmilyen garanciát a felület károsodásáért a termék helytelen eltávolítása és telepítése miatt. A termékek 10-12 órás napi üzemeltetésre alkalmasak. A termék napi 24 órás felhasználása érvényteleníti a garanciát. Ez a termék garanciája csak a gyártási hibákra vonatkozik.

FELSZERELÉSI UTASÍTÁS

1. Kapcsolja ki a tápellátást.
2. Rögzítse a lámpát a pályához, és fordítsa az adapter csúszkáló kapcsolót 0-ra (1. kép)
3. Állítsa be a lámpatest megvilágítási szögét. (2. kép)
4. Kapcsolja be a tápellátást, ha a fenti lépések megfelelően követett el hiba nélkül. (3. kép)

