


## WiFi Controller Operational Guideline 2

How to use home network and wifi controller at the same time.


If you want to operate the lamps while surfing the internet with iPhone iPad or Pod, please do as follows, let's take iPad as a sample.

1. Long Press Key "RST" on wifi box until you see the red indicator of "SYS" is on, revert to Factory Default Setting!
2. Please click "Settings" on iPad, go to "WLAN" and connect to "wifi\_socket".

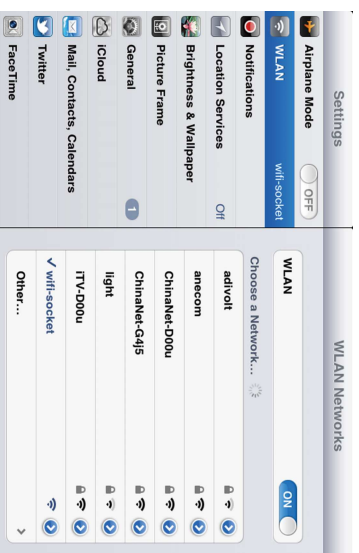

0126-1

3. Please go to "Safari" and logo on to 192.168.1.100, the default name is "admin", password is "000000".  
Picture:



You can easily finish the below two settings 4&5!

### 4. Wireless Settings

Work Type: Please choose : **Sta**

SSID: Please input your home wifi name. e.g. If your home wifi name is : **light**

Encryption: Please choose the encryption of your home wifi router, which you can find from your wifi router settings and instructions. e.g. **WPA2\_PSK(CCMP)**


Key Format: Also please input the key format of your home wifi router. e.g. **ASCII**

## WiFi Controller Operational Guideline 2

Encryption Key: Please input the password of your home wifi

After all the above settings, please always choose "Save".

See picture below as an example.

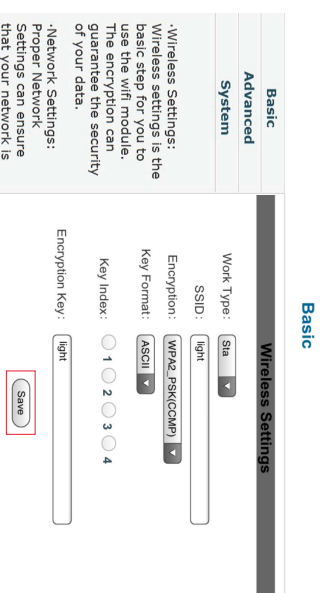

### 5. Network Settings

Please re-input the below information,

Fixed IP Address: Please input your local IP Address, but please change the last group of the numbers e.g. 192.168.1.100, so please change it into: 192.168.1.58! any numbers from 2-255)


Subnet Mask: Please input your subnet mask, e.g. 255.255.255.0

## WiFi Controller Operational Guideline 2

How to use home network and wifi controller at the same time.


If you want to operate the lamps while surfing the internet with iPhone iPad or Pod, please do as follows, let's take iPad as a sample.

1. Long Press Key "RST" on wifi box until you see the red indicator of "SYS" is on, revert to Factory Default Setting!
2. Please click "Settings" on iPad, go to "WLAN" and connect to "wifi\_socket".

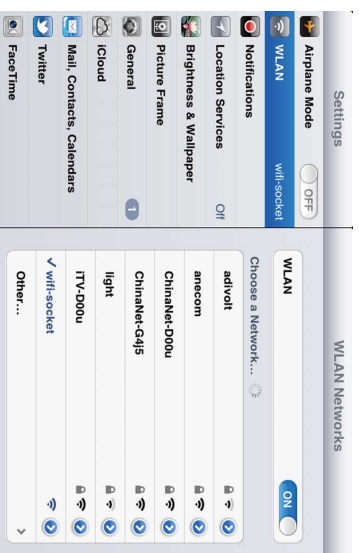

0126-1

3. Please go to "Safari" and logo on to 192.168.1.100, the default name is "admin", password is "000000".  
Picture:



You can easily finish the below two settings 4&5!

### 4. Wireless Settings

Work Type: Please choose : **Sta**

SSID: Please input your home wifi name. e.g. If your home wifi name is : **light**

Encryption: Please choose the encryption of your home wifi router, which you can find from your wifi router settings and instructions. e.g. **WPA2\_PSK(CCMP)**

Key Format: Also please input the key format of your home wifi router. e.g. **ASCII**


Gateway Address: Please input your gateway address. e.g. : 192.168.1.1

DNS Address: Please input your DNS Address, e.g. : 192.168.1.1

After all the above settings, please always choose "Save"


Please find all the above information from your home wifi router settings.

See picture below as an example,

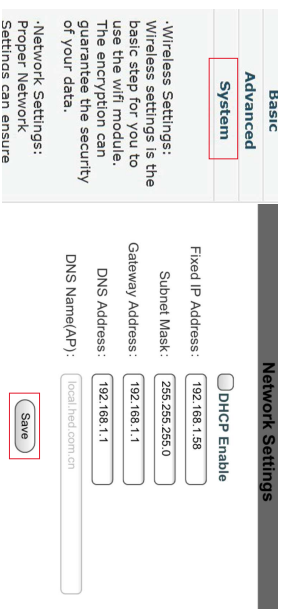


6. After settings of 4&5, please click the "System" on the left and choose "Restart System". Hold on for 10 seconds, and go back to "Settings" and then "WLAN" and connect your own home wifi.

Please see below picture as an example.

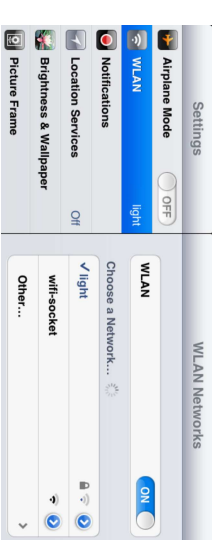

7. Please click "Controller" on the left and go to "Net Setting". Change the IP address to the same one as "Fixed IP Address", e.g. The one we set just now is : 192.168.1.58  
Please see below picture as an example.

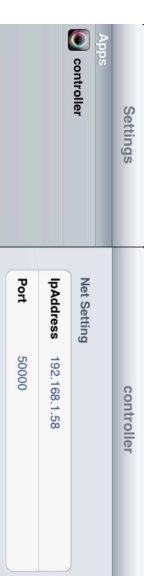

Now it's complete! You can use home internet to operate the lamps! For the synchronization of the app to the lamps or more detailed information, please refer to the main user manual! Thanks!