
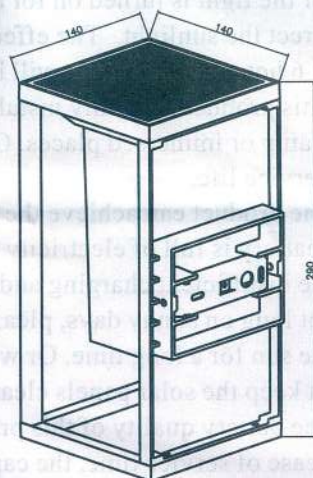


INSTALLATION INSTRUCTION

LED LIGHT

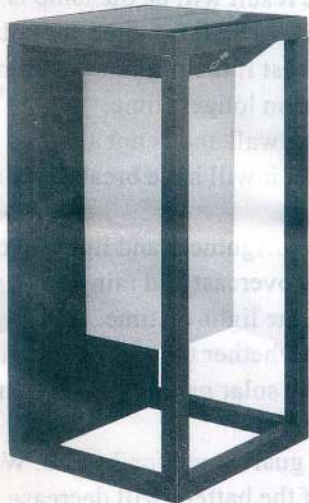


TECHNICAL DATA:


3 YEARS WARRANTY

Model No.	VT-77
Power:	2W
Lumens:	220lm
Beam Angle:	170
CRI:	>80
Protection Rating:	IP65

STRUCTURE & SIZE

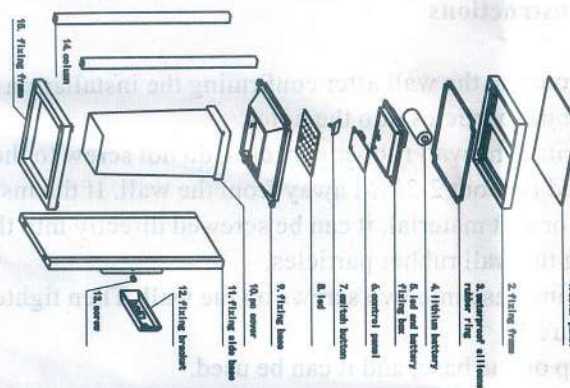

INSTALLATION DIAGRAM:

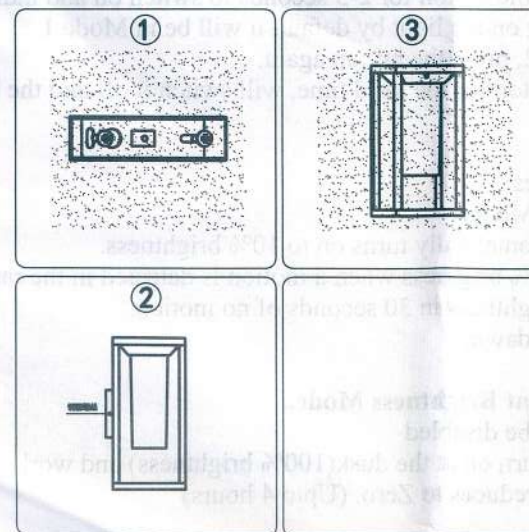



I. Installation instructions

1. To drill two holes on the wall after confirming the installation position, then put the rubber particles into the holes.
2. Put the screw into the wall rubber particles, do not screw to the end, it is ok the screw head is about 2-3MM away from the wall. If the installation surface is wood or soft material, it can be screwed directly into the wall without entering the wall rubber particles.
3. Put the mounting base into two screws on the wall. Then tighten the base as shown in Figure 1.
4. Install the lamp on the base, and it can be used.

Switch Function:

- Press and hold the button for 2-3 seconds to switch on and indicate a blue light.
- When switching on the light by default it will be in Mode 1.
- To enter Mode 2, press the button again.
- Pressing the button for the third time, will switch it off and the blue light will disappear.

Operating modes:

Mode 1: Sensor Mode.

- At the dusk, automatically turns on to 10% brightness.
- Turns on to 100% brightness when a motion is detected in the range of < 5 mtrs.
- Turn to 10% brightness in 30 seconds of no motion.
- Turns off at the dawn.

Mode 2: Constant Brightness Mode.

- The sensor will be disabled
- Automatically turn on at the dusk(100% brightness) and works constantly till the battery capacity reduces to Zero. (Upto 4 hours)



Notes

1. This product is a solar energy product. When installing, the solar panels of the product must be illuminated in the direction of the sun. Otherwise, it will affect the use of the product. The result will be the lamp is not turned on or the light is turned on for a short time. So it is better the solar panels are direct the sunlight. The effect is the best if the illumination time is longer than 6 hours and the light will be turned on longest time.
2. This product is mainly installed on the wall and is not allowed to be used in damp or immersed places. Otherwise, it will have breakdown and affects its service life.
3. The product can achieve the expected brightness and light-up time when the battery is full of electricity. Such as overcast and rainy days, which will cause insufficient charging and shorten the light-up time. If the lighting time is not long on sunny days, please check whether the solar panels are exposed to the sun for a long time. Or whether the solar panels are dirty and dusty, we must keep the solar panels clean.
4. The battery quality of this product is guaranteed for 3 years. With the increase of service time, the capacity of the battery will decrease. If it affects the time of using the light, it will be replaced by the battery. This product reserves the function of replacing the battery. After removing the connection wire of the original lithium battery, the battery will be removed and replaced with the new battery of the same specification.